



SubContractor™ Series SC-IW (In-Wall) Subwoofer

Velodyne Acoustics, the #1 rated subwoofer company for over 20 years, now offers the SubContractor Series - a powerful, easy-to-install line of subwoofers specially designed for any custom installation need.

The Velodyne SC-IW In-Wall Subwoofer System

At last – the Velodyne of in-wall subs! The SC-IW is the first in-wall to fit flush in a 2x4 studded wall and deliver reference quality performance. The patent-pending SC-IW driver fires vertically for maximum throw to reproduce the most demanding home theater and music with authority, accuracy and low distortion.

Features

- Fits FLUSH in a standard 2x4 studded wall
- Easy to install – two box system for new construction or retrofit
- Connects with conventional speaker wire
- Amazingly deep, powerful bass performance with minimal wall vibration
- The matched SC-1250 amplifier (sold separately) can drive one or, for ultimate performance, two SC-IW subs
- Includes a standard grille for easy installation and field servicing, and a designer-friendly 5" high grille (requires dry-walling over driver cabinet), both grilles are paintable to match room decor

Easy to Install 2-Piece Cabinet Design

The SC-IW features a unique two-box system. In new construction, the enclosure is mounted at the rough-in stage; the driver at the trim-out stage. The driver and enclosure screw onto a standard 2x4 stud with no other preparation needed, and are connected via silicon rubber conduits. Both pieces use a unique cabinet construction, only 4mm thick – a strong, well-damped, space-saving design.

Easy to Configure for Twin or Single Subs

The SC-1250 rack-mountable amplifier features 3000 watts dynamic / 1250 watts RMS power, and can easily drive twin SC-IW subs using standard speaker wire. The SC-1250 comes with DSP control; test-tone generator; 7-band automatic room equalizer; 12-volt trigger; IR repeater jack; RS-232 control port (Crestron Certified); and a full feature remote control with presets.

Patent Pending T-Shaped Driver

The SC-IW driver's unique, T-shaped design allows flush mounting in line with studding to minimize wall vibration. The long throw driver (1-inch peak travel) delivers the performance of a high quality in-room 10" subwoofer.



The SC-IW Two-Cabinet Design

The SC-IW can fire up or down in the wall.




The Patent Pending SC-IW Driver

Its unique T-shaped construction fires vertically in the wall giving it incredible output with low distortion and minimal vibration.

The SubContractor Series Subwoofers.

There's a sub for every situation, including the first in-wall that fits flush and performs like a Velodyne.

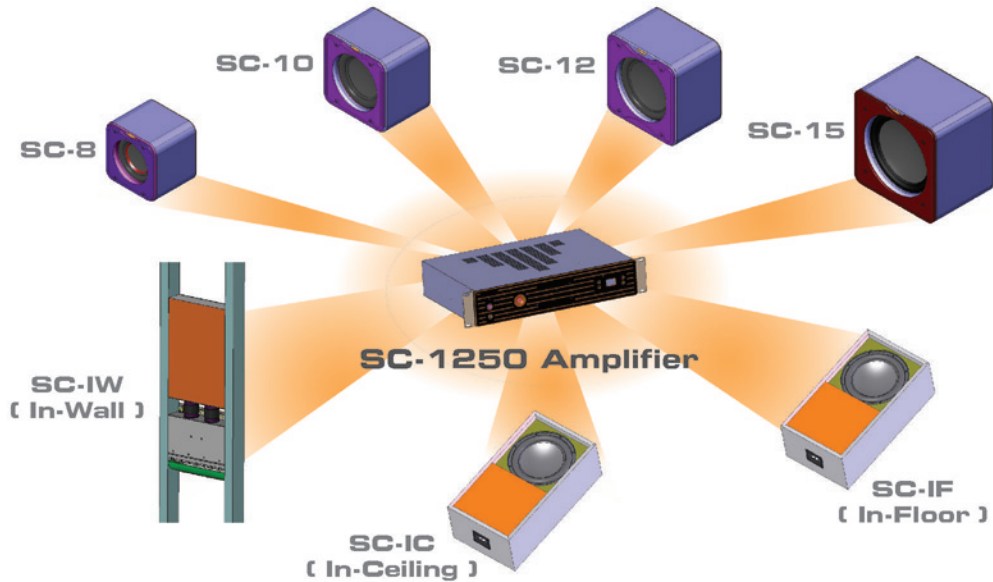

Please refer to the individual SC Series amp and subwoofer datasheets for specifications and performance.

Specifications	SC-IW (In-Wall)			
Woofer:	4" x 14" rectangular driver (3" x 13.25" piston dimensions)			
Frequency Response: (+/-3 dB)	22-120 Hz			
Harmonic Distortion:	<5% (typical)			
Magnet Structure:	275 oz. Neodymium motor structure			
Voice Coil:	3" Dual Layer inner/ outer wind			
Video Shielded:	Yes			
Product Dimensions* (H/W/D):	28 3/4" x 14" x 3 3/8" (73 x 35.56 x 8.57 cm)	Enclosure (only): 19" x 14" x 3 3/8" (48 x 36 x 8.6 cm)	Driver (only): 10 1/2" x 14" x 3 3/4" (27 x 36 x 9.5 cm)	
	*Not installed; excludes grilles, mounting brackets, etc.			
Cabinet:	Sealed enclosure			
Grille Options: (Both included)	Standard Grille:	17.0" x 13.8" (43.2 mm x 35 mm)	Designer Grille:	18.0" x 4.64" (45.72 mm x 11.8 mm)
Warranty: (parts/labor)	Two years			
Shipping Weight: (approx.)	2 Cartons = Carton 1: 16 lbs. (7.25 Kg), Carton 2: 27 lbs. (12.25 Kg) Total: 43 lbs (19.5 Kg)			

Copyright ©2007 Velodyne Acoustics, Inc.
Specifications are subject to change without notice.
Other trademarks or registered trademarks are property of their respective owners.
February 2007



www.velodyne.com

Velodyne Acoustics, Inc.
345 Digital Drive, Morgan Hill, CA 95037
408.465.2800

Velodyne