



SC-IW In-Wall Subwoofer SubContractor® Series

REFERENCE QUALITY CUSTOM INSTALLATION SUBWOOFERS

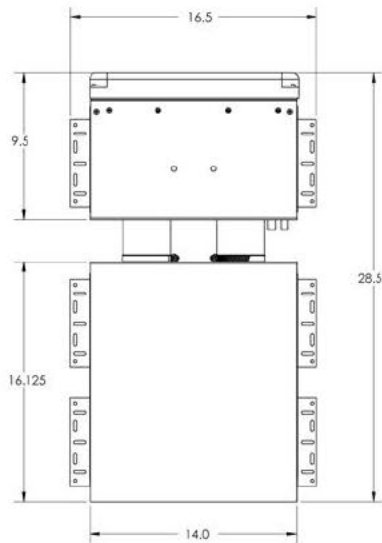

Important SC-IW Ordering Information

The SC-IW consists of two separate part numbers: SC-IWDVR and SC-IWBB. The SC-IWDVR is the in-wall sub driver module and comes complete with two optional grilles. The SC-IWBB is the performance enclosure and can be installed at rough-in. One SC-IWBB is necessary for each SC-IW unit's installation. Each part number must be ordered separately.

Features

- Fits FLUSH in a standard 2x4 studded wall
- Easy to install – two box system for new construction or retrofit
- Connects with conventional speaker wire
- Amazingly deep, powerful bass performance with minimal wall vibration
- The matched SC-1250 amplifier (sold separately) can drive one or, for ultimate performance, two SC-IW subs
- Includes a standard grille for easy installation and field servicing, and a designer-friendly 5" high grille (requires dry-walling over driver cabinet), both grilles are paintable to match room decor

SPECIFICATIONS

Model	SC-IW Subwoofer
Woofer	4" x 14" rectangular driver (3" x 13.25" piston dimensions)
Frequency Response (+/-3 dB)	22-120 Hz
Harmonic Distortion	<5% (typical)
Magnet Structure	275 oz. Neodymium motor structure
Voice Coil	3" Dual Layer inner/outer wind
Video Shielded	Yes
Dimensions* (H/W/D)	28.5" x 14" x 3.5" (72 x 35.6 x 8.6 cm)
*Not installed; excludes grilles, mounting brackets, etc.	Enclosure (only): 16.125" x 14" x 3.5" (48 x 36 x 8.6 cm)
	Driver (only): 9.5" x 14" x 3.75" (27 x 36 x 9.5 cm)
Cabinet	Sealed enclosure
Grille Options (Both included)	Standard Grille: 17.0" x 13.8" (43.2 mm x 35 mm)
	Designer Grille: 18.0" x 4.64" (45.72 mm x 11.8 mm)
Shipping Weight (approx.)	2 Cartons = Carton 1: 16 lbs. (7.25 Kg), Carton 2: 27 lbs. (12.25 Kg) Total: 43 lbs (19.5 Kg)