
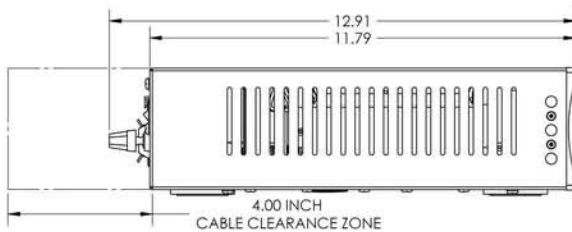


## SC-602 Amplifier

### SubContractor® Series

A POWERFUL AMP CAPABLE OF RUNNING TWO SC-600 SUBWOOFERS

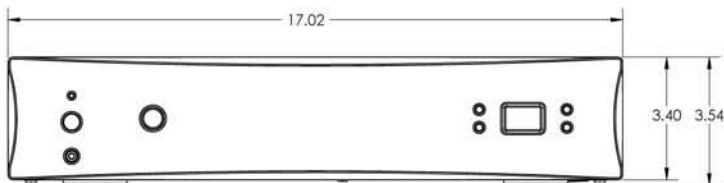

#### Features

- Incredibly easy to install and configure
- Control up to TWO SC-600 subwoofers with a single amp
- 400W (x2) Dynamic, 200W (x2) RMS amplifier power (dual-mono)
- 5-Band, Auto-EQ room bass correction system
- Full feature IR remote control with four listening presets
- Comes complete with remote, microphone and rack mount hardware

#### SPECIFICATIONS

Model	SC-602 Amplifier
Amplifier (dual-mono)	400W (x2) Dynamic
Class D	200W (x2) RMS Power
High Pass Crossover	80 Hz (6 dB/octave)
Low Pass Crossover	30 Hz-160 Hz, Defeatable, 24 dB/octave slope
Inputs	Line and Speaker Level
Outputs	Line Level, 80 Hz up, Speaker Level
Phase	0°, 90°, 180°, 270°
Dimensions (H/W/D) (Inc. feet & knobs)	3.6" x 17" x 13" (9 cm x 43.2 cm x 33 cm)
	** Allow two extra inches in depth for wire connectors and power cable.
	** Includes feet. Feet can be removed for rack mount use. Unit is approximately "two rack units" high.
Warranty (parts/labor) (North America)	Three years (electronics)
Shipping Weight (approx.)	25 lbs. (22.7 kg)